

**deining**

elektronik gmbh & co. kg

Rudolf-Diesel-Str. 4 • 76356 Weingarten  
Tel. +49 (7244) 7016-0 • Fax +49 (7244) 7016-33

info@deining-gmbh.de • www.deining-gmbh.de



# Integra™

Control Center Performance. Intelligently Delivered.

The IndigoVision Integra™ gives you the best of both worlds with a powerful workstation, integrated PoE switch and up to 24TB of storage for video recordings. Supporting up to two monitors, the IndigoVision Integra™ can display up to 24 simultaneous video streams. Designed and configured for easy installation with performance guaranteed.

## Key Features

COMPRESSION



OTHER




## Product Codes


Integra™	
Integra™ 8, 2TB with 8 Camera License	980600
Integra™ 8, 4TB with 8 Camera License	980601
Integra™ 16, 6TB with 16 Camera License	980602
Integra™ 16, 12TB with 16 Camera License	980603
Integra™ 24, 18TB with 24 Camera License	980604
Integra™ 24, 24TB with 24 Camera License	980605
Integra™ Software Upgrade (per device connection)	321000
Integra™ View	
Integra™ View Mini Workstation with Band 1 licensing (1-24 Channels)	980623
Integra™ View Mid Workstation with Band 2 licensing (25-96 Channels)	980624
Integra™ View Mid Workstation with Band 3 licensing (97-168 Channels)	980625
Integra™ View Mid Workstation with Band 4 licensing (> 168 Channels)	980626
Integra™ View License Upgrade Band 2 to Band 3	320002-23
Integra™ View License Upgrade Band 2 to Band 4	320002-24
Integra™ View License Upgrade Band 3 to Band 4	320002-34

## Dimensions

### Integra™ 8

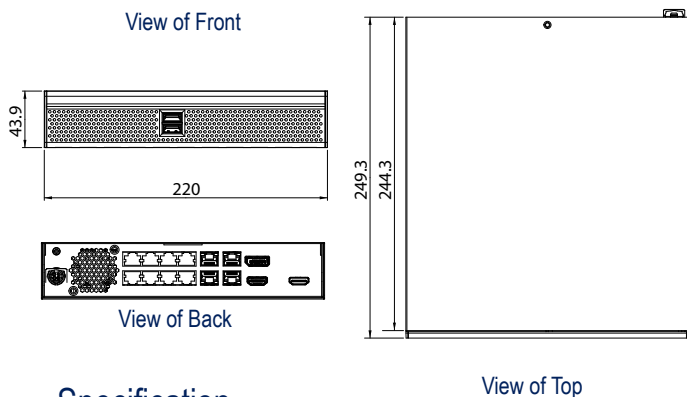

### Integra™ 16/24

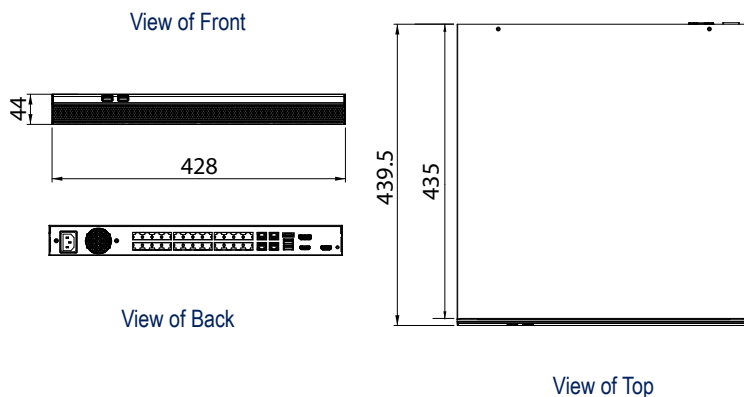

## Specification

General Specification	Integra™ 8		Integra™ 16		Integra™ 24	
<b>Device Connections</b>	8		16		24	
<b>Disk Capacity</b>	2TB	4TB	6TB	12TB	18TB	24TB
<b>Performance</b>	8 recording streams, 1080p 30fps 4Mbps 4 live streams, 1080p 30fps 4Mbps 2 CC Mobile streams, 1080p 30fps 4Mbps OR 8 recording streams, 1080p 30fps 4Mbps 8 live streams, 4SIF 30fps 1Mbps 2 CC Mobile streams, 1080p 30fps 4Mbps OR 8 recording streams, 1080p 30fps 4Mbps 8 live streams, 1080p 30fps 4Mbps CC Web/Mobile Media Server powered off		16 recording streams, 1080p 30fps 4Mbps 16 live streams, 4SIF 30fps 1Mbps 2 CC Mobile streams 1080p 30fps 4Mbps OR 16 recording streams, 1080p 30fps 4Mbps 4 live streams, 1080p 30fps 4Mbps 3 CC Mobile streams, 1080p 30fps 4Mbps OR 16 recording streams, 1080p 30fps 4Mbps 8 live streams, 1080p 30fps 4Mbps CC Web/Mobile Media Server powered off		24 recording streams, 1080p 30fps 4Mbps 24 live streams, 4SIF 30fps 1Mbps 2 CC Mobile streams 1080p 30fps 4Mbps OR 24 recording streams, 1080p 30fps 4Mbps 4 live streams, 1080p 30fps 4Mbps 3 CC Mobile streams, 1080p 30fps 4Mbps OR 24 recording streams, 1080p30 4Mbps 8 live streams, 1080p 30fps 4Mbps CC Web/Mobile Media Server powered off	
<b>Recording Throughput</b>	128Mbps		256Mbps		384Mbps	
<b>Playback Rate</b>	128Mbps		256Mbps		384Mbps	
<b>Operating System</b>	Windows 10 Enterprise Edition 2016 LTSC					
<b>Processor</b>	Intel Skylake i5			Intel Skylake i7		
<b>Memory</b>	8GB DDR4 (2x4GB)			16GB DDR4 (2x8GB)		
<b>O/S Hard Disk</b>	1 x 500GB Hard drive					
<b>Recording Hard Disk</b>	1 x 3.5" SATA surveillance hard drive			4 x 3.5" SATA surveillance hard drives (RAID5)		
<b>USB</b>	2x USB 3.0 3x USB 2.0			3x USB 3.0 2x USB 2.0		
<b>PoE Ports</b>	8x 10/100 (802.3at) PoE+ , 120W (max)		16x 10/100 (802.3at) PoE+ , 240W (max)		24x 10/100 (802.3at) PoE+ , 360W (max)	
<b>Uplink</b>	10/100/1000Mbps					
<b>Port Mirroring</b>	Many to one (Tx/Rx)					
<b>Switch Control</b>	Managed Switch via web page, DHCP Server, DHCP RelayAgent, STP, Link Aggregation, Port Mirroring, IGMP Snooping, 802.1Q VLAN, ACL, QoS					
<b>Video Interface</b>	On board Intel HD Graphics 530 2x HDMI (1080p), 1x DisplayPort (1080p), dual monitor output					
<b>Audio Interface</b>	Mic In, Headphone					
<b>Form Factor</b>	Small Form Factor			1U Rack Mount		
<b>Dimensions/Weight</b>	220 x 244.3 x 43.9 and 2.5kg			428 x 435 x 44 and 6.1kg		428 x 435 x 44 and 6.1kg
<b>Electrical</b>	Operating Voltage: Input 100-240V ~ 47-63Hz; Power consumption: 200W (max). 56V power supply included		Operating Voltage: Input 100-240V ~ 47-63Hz; Power consumption: 420W (max)		Operating Voltage: Input 100-240V ~ 47-63Hz; Power consumption: 520W (max)	
<b>Housing</b>	Mild Steel Chassis and Polycarbonate Fascia					
<b>Temperature</b>	Operating: 0°C to 40°C Storage: 0° to 50°C					
<b>Humidity</b>	10% to 90% non-condensing					
<b>Regulatory</b>	EN 60068-2-1, EN 60068-2-2, EN 60068-2-30, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-3, EN 61000-6-2, FCC Part 15 subpart B, AS/NZS 61000.6.4, EN60068-2-6, EN60068-2-64, EN60068-2-27					
<b>Supplied Accessories</b>	HDD Caddy Keys, External Power Supply, Power Cable			HDD Caddy Key, Rack Mount Kit, Power Cable		
<b>Software Requirements</b>	Control Center, NVR-AS, License Server and CC Web/Mobile Server pre-installed. Integra™ View Workstation required to view more than one Integra™					