

1008123110

## TFIX-1-V2

Ex IP Intercom Station- full keypad



- ✓ Ex IP intercom for potentially explosive atmospheres - Directive 2014/34/EU
- ✓ Ethernet compatible 2-wire interface
- ✓ DIP functionality for use with AlphaCom audio servers
- ✓ SIP/VoIP functionality for use with 3rd-party systems
- ✓ Dust- and water-protected to IP66
- ✓ Monitoring and self-diagnostics of critical functionality
- ✓ ONVIF Compatible
- ✓ Visible status indicators on front panel
- ✓ Separate amplifier for external loudspeaker (25W)
- ✓ Signal relay for external beacon



SIP



Turbine

**IC-EDGE**

IC-Edge



ICX-AlphaCom



IP66



IEC Ex Intercom



Atex



Active Noise Cancelling



IP over 2-wire

## Description


The TFIX-1-V2 Explosion-proof intercom station is a rugged device, designed for harsh environments and meets industrial and offshore requirements as well as requirements for ATEX Zone 1 operation. The plastic housing is designed to withstand most chemical and environmental hazards found on- or offshore.

The TFIX-1-V2 features a full keypad with 1 programmable button and keys for manual override (PTT) and Cancel.

The intercom station is fully digital and offers crystal clear audio with high output through an internal amplifier and 78 mm speaker, delivering over 90dB SPL. Active Noise Reduction and Acoustic Echo Cancelling allows for hands-free two-way communication with superior audio quality.

Intercom status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems.

## Technical Dimensions

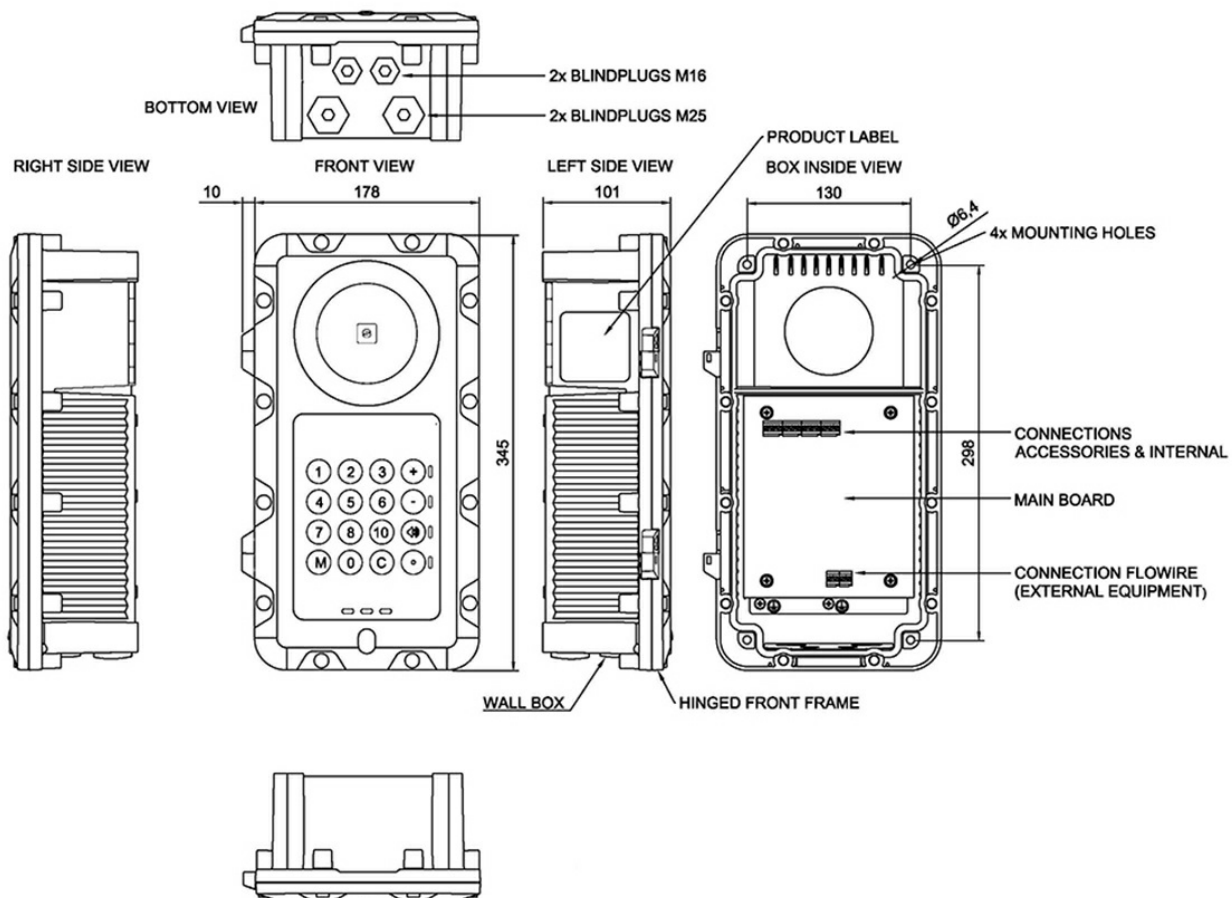

# Specifications

## MECHANICAL

Dimensions	345 x 178 x 101 mm
Weight	4 kg
Mounting	On-wall box (included)
Color	Black

## ENVIRONMENTAL

Operating temperature	-20°C to +55°C
Storage temperature	-40°C to +70°C
Operating humidity	10% to 95% RH (non-condensing)
Storage humidity	10% to 95% RH (non-condensing)
Air pressure	600 hPa to 1200 hPa
IP rating	IP64 in accordance with IEC 60079-0
	IP66 in accordance with EN 60945
IK rating	4J

## ELECTRICAL

PoE	NO, proprietary 2-wire data- and power bus
Power consumption	4.2 W (idle) to 8 W (max), 38.5W (max) with external loudspeaker
DC power	24-48 VDC (SELV)
	48 DVC PSU required when using external amplifier (One FCDC3 per station is also recommended when using external amplifier).

## NETWORK

Connection	2 x 2-wire
Connection type	Screw terminals
Functions	Auto negotiating
Built-in switch	N/A
Compatibility	SIP, ICX-AlphaCom, IC-EDGE, G.711, G.722, G.729, HD Voice, ONVIF

## INPUTS AND OUTPUTS

Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal) + PTT
Headset	Microphone (bal), Speaker (bal), + PTT
Digital inputs/outputs	2 (Ex i type)
Relay outputs	1 (60VDC, 320mA, 10 <sup>8</sup> operations)
Audio	Yes, for audio accessories
Aux power	Provided by network cable
External speaker amplifier	25W class D
External speaker specifications	Impedance=8Ohm, minimum rated power: 25W
	Impedance=20Ohm, minimum rated power: 10W

## CERTIFICATIONS

Immunity	EN 60945, EN 61000-6-2
Emission	EN 60945, EN 61000-6-3, EN 61000-6-4
CENELEC safety standards	EN 60079-0:2018, EN 60079-7:2015/A1:2018, EN 60079-11:2012, EN 60079-18:2015/A1:2017
IEC safety standards	IEC 60079-0:2017, IEC 60079-7:2017, IEC 60079-11:2011, IEC 60079-18:2017
Marking	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +55°C

## Accessories



AK5850HS

Ex-approved Headset



TAX-2B

Ex-Approved Plugbox & Cable for Headset with PTT



TAX-3

EX Handset




EMMAX-1H

Handheld Industrial EX Microphone For Exigo/Turbine



### FCDC3

Flowwire Ethernet Converter - DC Voltage



### EGA-1

Button Protection Covers



### Power Supply 100-240VAC/48VDC 2A



### DSP-15 EExmN, 25W

Ex horn speaker for TFIX-V2 stations, 8Ohm



### TNFCD2G212

Ex proof beacon, Eexde 24-48VDC GREEN, 1 x M25 gland

**deining**  
elektronik gmbh & co. kg

Rudolf-Diesel-Str. 4 • 76356 Weingarten  
Tel. +49 (7244) 7016-0 • Fax +49 (7244) 7016-33  
info@deining-gmbh.de • www.deining-gmbh.de