

1008123130

TFIX-3-V2

Ex IP Intercom Station with 3 buttons



- ✓ Ex IP intercom for potentially explosive atmospheres - Directive 2014/34/EU
- ✓ Ethernet compatible 2-wire interface
- ✓ ONVIF Compatible
- ✓ DIP functionality for use with AlphaCom audio servers
- ✓ SIP/VoIP functionality for use with 3rd-party systems
- ✓ Dust- and water-protected to IP66
- ✓ Monitoring and self-diagnostics of critical functionality
- ✓ Visible status indicators on front panel
- ✓ Separate amplifier for external loudspeaker (25W)
- ✓ Signal relay for external beacon



SIP



Turbine



IC-Edge



ICX-AlphaCom



IP66



IEC Ex Intercom



Atex



Active Noise Cancelling



IP over 2-wire

Description


The TFIX-3-V2 Explosion-proof intercom station is a rugged device, designed for harsh environments and meets industrial and offshore requirements as well as requirements for ATEX Zone 1 operation. The plastic housing is designed to withstand most chemical and environmental hazards found on- or offshore.

The TFIX-3-V2 features a single oversized call-button and keys for manual override (PTT) and Cancel.

The intercom station is fully digital and offers crystal clear audio with high output through an internal amplifier and 78 mm speaker, delivering over 90 dB SPL. Active Noise Reduction and Acoustic Echo Cancelling allows for hands-free two-way communication with superior audio quality.

Intercom status indicators display the status of the system and are compatible with AlphaCom and Exigo systems as well as SIP functionality for use with 3rd party systems.

Technical Dimensions

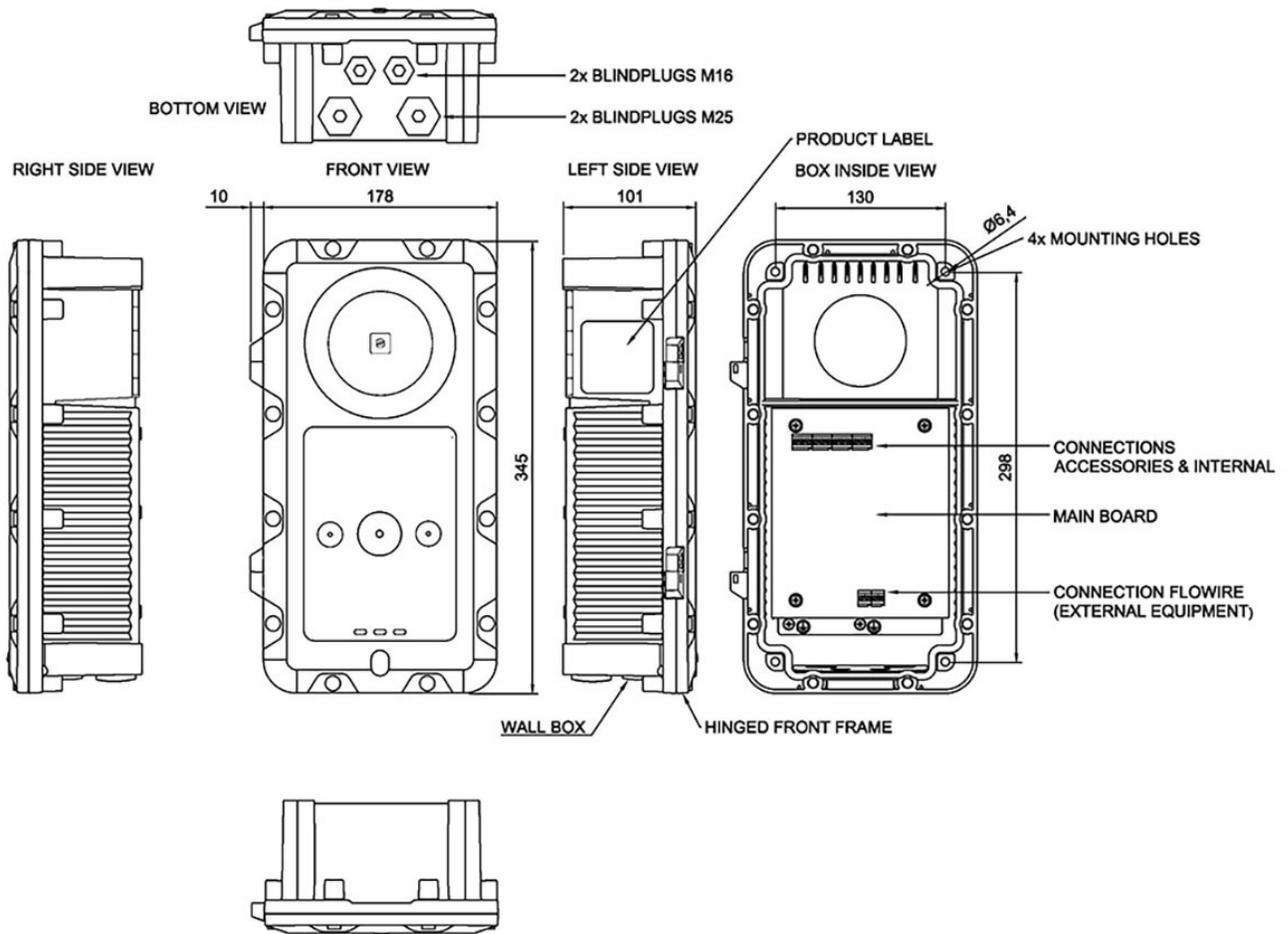

Specifications

MECHANICAL

Dimensions	345 x 178 x 101 mm
Weight	4 kg
Mounting	On-wall box (included)
Color	Black

ENVIRONMENTAL

Operating temperature	-20°C to +55°C
Storage temperature	-40°C to +70°C
Operating humidity	10% to 95% RH (non-condensing)
Storage humidity	10% to 95% RH (non-condensing)
Air pressure	600 hPa to 1200 hPa
IP-rating	IP64 in accordance with IEC 60079-0 IP66 in accordance with EN 60945
IK rating	4J

ELECTRICAL

PoE	NO, proprietary 2-wire data- and powerbus
Power consumption	4.2 W (idle) to 8 W (max), 38.5W (max) with external loudspeaker
DC power	24-48 VDC (SELV) 48 DVC PSU required when using external amplifier (One FCDC3 per station is also recommended when using external amplifier)

NETWORK

Connection	2 x 2-wire
Connection type	Screw terminals
Functions	Auto negotiating
Built-in switch	N/A
Compatibility	SIP, ICX-AlphaCom, IC-EDGE, G.711, G.722, G.729, HD Voice, ONVIF

INPUTS AND OUTPUTS

Handheld Microphone	Microphone (bal), PTT
Handset	Microphone (bal), Speaker (bal), + PTT
Headset	Microphone (bal), Speaker (bal), + PTT
Digital inputs/outputs	2 (Ex i type)
Relay outputs	1 (60VDC, 320mA, 10 ⁸ operations)
Audio	Yes, for audio accessories
Aux power	Provided by network cable
External speaker amplifier	25W class D
External speaker specifications	Impedance=8Ohm, minimum rated power: 25W
	Impedance=20Ohm, minimum rated power: 10W

CERTIFICATIONS

Immunity	EN 60945, EN 61000-6-2
Emission	EN 60945, EN 61000-6-3, EN 61000-6-4
GENELEC safety standards	EN 60079-0:2018, EN 60079-7:2015/A1:2018, EN 60079-11:2012, EN 60079-18:2015/A1:2017
IEC safety standards	IEC 60079-0:2017, IEC 60079-7:2017, IEC 60079-11:2011, IEC 60079-18:2017
Marking	II 2(2) G Ex e ib mb [ib] IIC T4 Gb -20°C ≤ Ta ≤ +55°C

Accessories



AK5850HS

Ex-approved Headset



TAX-2B

Ex-Approved Plugbox & Cable for Headset with PTT



TAX-3

EX Handset



EMMAX-1H

Handheld Industrial EX Microphone For Exigo/Turbine



FCDC3

Flowire Ethernet Converter - DC Voltage



Power Supply 100-240VAC/48VDC 2A



DSP-15 EExmN, 25W

Ex horn speaker for TFIX-V2 stations, 8Ohm



TNFCD2G212

Ex proof beacon, Eexde 24-48VDC GREEN, 1 x M25 gland

deining
elektronik gmbh & co. kg

Rudolf-Diesel-Str. 4 • 76356 Weingarten
Tel. +49 (7244) 7016-0 • Fax +49 (7244) 7016-33
info@deining-gmbh.de • www.deining-gmbh.de